




GERAND ENGINEERING CO.

2300 EDGEWOOD AVE S, MINNEAPOLIS, MN 55426 952.374.1320 WWW.GERAND.COM

MODEL M-VMM SYSTEM

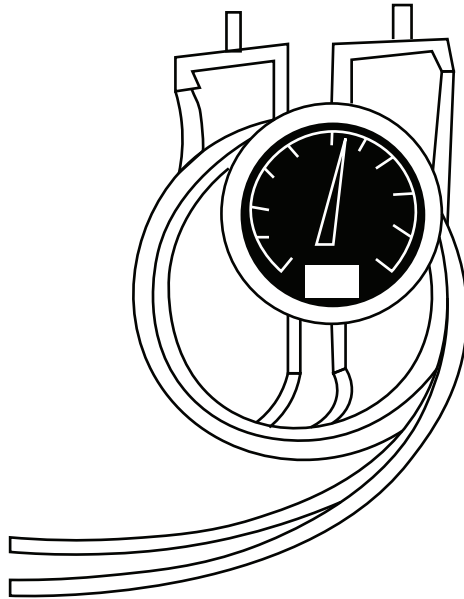

THE ASSEMBLY CONSISTS OF THE FOLLOWING:

GERAND VENTURI - BUTTWELD, GROOVED OR FLANGED (150# OR 300#).

ALL BUTTWELD AND GROOVED UNITS ARE RATED FOR 500 PSI.

ALL 150# FLANGED UNITS ARE RATED AT 275 PSI.

ALL 300# FLANGED UNITS ARE RATED AT 500 PSI.

A METER NIPPLE WELDED TO THE VENTURI.

A 6" DIAL METER READING IN INCHES OF WATER, DIRECT READING GPM, LPM OR M³/H. THE METER IS A LIQUID FILLED, BELLOWS TYPE WITH A 270° ARC AND ACCURACY OF ±.5% FULL SCALE.

2 1/2" HOSES WITH BRASS FITTINGS, INCLUDING SHUT-OFF VALVE AT VENTURI, TO CONNECT METER TO VENTURI.

WHEN ORDERING, PLEASE SPECIFY THE VENTURI SIZE, MODEL NUMBER AND END CONNECTIONS, THE SIZE OF THE METER RANGE AND THE RANGE OF THE METER.

